
# ACU>RITE. Wind Extension for AcuRite® Atlas™ Model 06072

## **COMPONENTS**

- 1. Wind Assembly
- 2. AcuRite Atlas outdoor device



3. Extension Base



4. Extension Cord




5. Cord Connector-A



6. Cord Connector-B




- 7. Connection Compartment
- 8. Connection Compartment Door




9. Rubber Guard







On the AcuRite Atlas outdoor device, hold the Wind Assembly firmly by the base, turn it counter-clockwise to unlock, and lift to remove. Caution: Do not lift or hold by the wind cups or wind vane.




Open the **Connection Compartment Door** on the **Extension Base**.

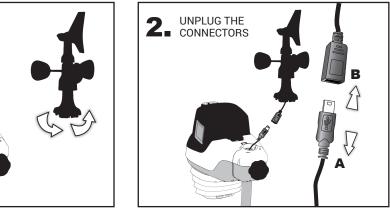


Unplug the connector between the Wind Assembly and AcuRite Atlas.




Run Cord Connector-A on the Extension Cord through the Connection Compartment in the Extension Base.



Plug Cord Connector-B into the Wind Assembly's connector.




Combine the Wind Assembly with the Extension Base by turning the Wind Assembly clockwise, then firmly press the Connector into the strain relief slot in the Connection Compartment for stability. Then, close the Connection Compartment.




Mount the combined Wind Assembly Extension Base on a pole away from the AcuRite Atlas outdoor device, within range of the Extension Cord. The Connection Compartment Door should be facing south to maintain proper wind direction orientation.


- To maximize the accuracy of wind measurements, the National Weather Service recommends mounting anemometers 33 feet (10 meters) above ground.
- Avoid nearby wind obstructions such as trees and buildings.
- Be sure to mount the outdoor device securely, as swaying or shaking may cause inaccurate wind readings.



Run the Extension Cord from the Extension Mount to the AcuRite Atlas outdoor device. being sure to secure any extra slack. Be sure to distribute the slack, as wrapping the cord around itself several times in one location could cause interference.



Plug Cord Connector-B into the AcuRite Atlas outdoor device connector.



The Rubber Guard helps prevent water and debris from entering AcuRite Atlas. On the AcuRite Atlas outdoor device, tuck in the connected cord and place the Rubber Guard over the hole.

# **Optional:**

If AcuRite Atlas is mounted on the same pole as the Wind Extension. the Rubber Guard can be cut to accommodate the



pole's diameter. If needed, carefully cut a hole in the Rubber Guard just large enough to fit around the pole.

### **HAVING PROBLEMS?**

We're Here to Help.

Visit us online www.AcuRite.com



Get more information or download the full AcuRite Atlas™ product manual.



Our friendly U.S. based support team is ready to assist you.

#### **Limited 1 Year Warranty**

AcuRite is a wholly owned subsidiary of Chaney Instrument Company. For purchases of AcuRite products, AcuRite provides the benefits and services set forth herein. For purchases of Chaney products, Chaney provides the benefits and services set forth herein. We warrant that all products we manufacture under this products we have a few and the services set forth herein. We warrant that all products we manufacture under this product was a few and the products when the products we want to be a few and the products when the products we want to be a few and the products when the products were the pr this warranty are of good material and workmanship and, when properly installed and operated, will be free of defects for a period of one year from the date of purchase.

Any product which, under normal use and service, is proven to breach the warranty contained herein within ONE YEAR from date of sale will, upon examination by us, and at our sole option, be repaired or replaced by us. Transportation costs and charges for returned goods shall be paid for by the purchaser. We hereby disclaim all responsibility for such transportation costs and charges. This warranty will not be breached, and we will give no credit for products which have received normal wear and tear not affecting the functionality of the product, been damaged (including by acts of nature), tampered, abused, improperly installed, or repaired or altered by others than our authorized

Remedy for breach of this warranty is limited to repair or replacement of the defective item(s). If we determine that repair or replacement is not feasible, we may, at our option, refund the

amount of the original purchase price.
THE ABOVE-DESCRIBED WARRANTY IS THE SOLE WARRANTY
FOR THE PRODUCTS AND IS EXPRESSLY IN LIEU OF ALL
OTHER WARRANTIES, EXPRESS OR IMPLIED. ALL OTHER OTHER WARRANTIES, EARNESS OR IMPLED. ALL OTHER WARRANTIES OTHER THAN THE EXPRESS WARRANTY SET FORTH HEREIN ARE HEREBY EXPRESSLY DISCLAIMED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTY OF MERCHANTABILITY AND THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.

We expressly disclaim all liability for special, consequential, or incidental damages, whether arising in tort or by contract from any breach of this warranty. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you

We further disclaim liability from personal injury relating to its products to the extent permitted by law. By acceptance of any of our products, the purchaser assumes all liability for the consequences arising from their use or misuse. No person, firm or corporation is authorized to bind us to any other obligation or liability in connection with the sale of our products. Furthermore, no person, firm or corporation is authorized to modify or waive the terms of this warranty unless done in writing and signed by a duly authorized agent of ours.

In no case shall our liability for any claim relating to our products, your purchase or your use thereof, exceed the original purchase price paid for the product.

©Chaney Instrument Co. All rights reserved. AcuRite is a registered trademark of the Chaney Instrument Co., Lake Geneva, WI 53147. All other trademarks and copy-rights are the property of their respective owners. AcuRite uses patented technology. Visit www.AcuRite.com/patents for details.

QSG17\_06072 101317